

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
15 February 2001 (15.02.2001)

PCT

(10) International Publication Number
WO 01/11588 A2

- (51) International Patent Classification: G09B 5/06
- (21) International Application Number: PCT/US00/21864
- (22) International Filing Date: 8 August 2000 (08.08.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/147,975 9 August 1999 (09.08.1999) US
09/557,644 25 April 2000 (25.04.2000) US
- (71) Applicant and
(72) Inventor: SONG, Jin, K. [US/US]; 2316 Woodfield Way,
Bedford, TX 76012 (US).
- (74) Agent: NAVARRO, Arthur, I.; Navarro IP Law Group,
P.C., 801 East Campbell Road, #655, Richardson, TX
75081 (US).
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— Without international search report and to be republished upon receipt of that report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND SYSTEM FOR ILLUSTRATING SOUND AND TEXT

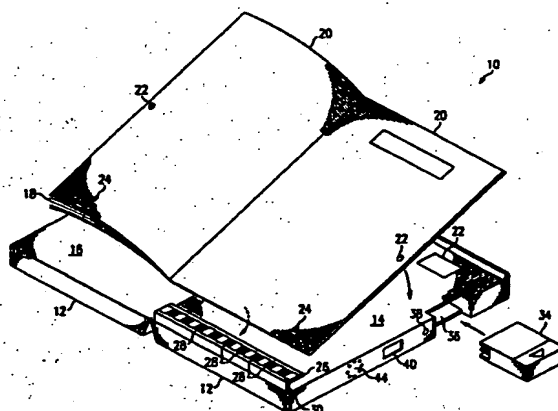

(57) Abstract: A method and system (10) for illustrating sound and text comprising a book (18) with pages (20) including illustration and/or text, wherein at least some of the pages (20) include magnetic signatures (24). The system further includes a book holder (12) adapted to accept the book (18). As such, the book holder (12) has a reading surface (14) with a magnetic signature sensor (16), a cartridge slot (36), a reading controller (42), a speaker (44), and a power supply (46). The system also comprises a cartridge (34) adapted to be inserted in the cartridge slot (36). The cartridge (34) includes stored audio representations related to the illustrations and/or text of the pages (20). The magnetic signature sensor (16) is predisposed to detect the magnetic signatures (24) on the pages (20) as they are turned by a user viewing the book (18). Furthermore, the reading controller (42) is adapted to interact with the magnetic signature sensor (16) to determine what page or pages (20) the user is viewing and to retrieve the audio representations of the illustrations and/or text stored on the cartridge (34) corresponding to the page or pages (20) being viewed by the user. Thus, the reading controller (42) reproduces the audible sounds related to the retrieved audio representations through the speaker (44) for listening by the user.

BEST AVAILABLE COPY

WO 01/11588 A2

A METHOD AND SYSTEM FOR ILLUSTRATING SOUND AND TEXT**CROSS-REFERENCE TO RELATED APPLICATION**

5 The application is commonly assigned and related to Provisional Application Serial No. 60/147,975 entitled "A System for Sound Illustrated Text," by Jin K. Song, filed August 9, 1999, the entirety of which is incorporated herein by reference. This application claims priority on the
10 aforementioned related provisional application.

FIELD OF THE INVENTION

15 The present invention relates generally to a method and system for illustrating sound and text. More particularly, the present invention relates to a method for illustrating sound and text utilizing a book holder adapted to accept a book with pages including illustrations and/or text, at least some of the pages including magnetic signatures. The present invention also relates to a method for electronically storing text and audio content for use in an
20 electronic book reader system.

BACKGROUND OF THE INVENTION

25 Without limiting the scope of the invention, its background is described in connection with electronic book reader systems.

30 Substantial interest has long been given by the public to books which include sound illustration related to the text and/or illustration content within the book. Such sound illustrated books range in the industry from children's story books to manuals for learning a foreign language. Their popularity stems from the fact that a user can visually follow the text and/or illustration

content in the book while listening to the audible representations corresponding to the text and/or illustration content.

5 The sound illustrated books enjoyed by the public today include pages comprising a pre-recorded sound chip which includes stored data (e.g., voice and sound). A problem with this type of sound illustrated book is that sound chips generally have a limited amount of memory storage capability. In addition, these chips are directly attached to each page. This can add significantly to the overall weight and girth of the page, or require the use of
10 thick, almost cardboard-like, paper stock.

15 Other sound illustrated books are those that include a book and an audio cassette tape. The book, however, only has text and/or illustrations. It is the cassette tape that contains pre-recorded audio representations (e.g., voice and/or sound) which correspond with the text and/or illustrations on the pages of the book. In operation, the reader must follow the rhythm of the cassette. When the reader reaches a point for turning the page, a sound or voice instruction is heard indicating such action. If, however, the reader is not following attentively, the audio cassette will continue delivering audio
20 representations until stopped manually, or until the cassette reaches its end. As such, the reader may find him/herself on the wrong page.

SUMMARY OF THE INVENTION

25 The present invention provides for an electronic book reader with a magnetic signature sensor capable of detecting magnetic signatures attached to pages of a book. The magnetic signatures can be placed at specified locations of the book and used by the reader to retrieve electronic equivalent representations of the text and/or illustrations on the pages for audible
30 delivery.

Disclosed in one embodiment of the present invention is a system for illustrating sound and text. The system comprises a book with pages including illustrations and/or text. At least some of the pages include magnetic signatures which are attached in specific locations.

5

The system further comprises a book holder adapted to accept the book. The book holder includes a reading surface, which is a substantially flat platform, comprising a magnetic signature sensor. The magnetic signature sensor is predisposed to detect magnetic signatures on the pages as they are turned by a user viewing the book. The book holder further includes a cartridge slot adapted to receive a cartridge including stored audio representations related to illustrations and/or text on the pages of the book. The book holder also comprises a reading controller which is adapted to interact with the magnetic signature sensor to determine what page, or pages the user is viewing. Furthermore, the reading controller is adapted to retrieve audio representations of illustrations and/or text stored on the cartridge corresponding to the page, or pages being viewed by the user, as well as to reproduce audio sounds related to the audio representations through a speaker for listening by the user. The book holder also includes a speaker and a power supply which are communicably coupled with the reading controller. The power supply is adapted to control the activation and deactivation of the book holder.

10

15

20

25

30

Disclosed in another embodiment of the present invention is a method for illustrating sound and text utilizing a book holder which includes a reading controller, a speaker, and a magnetic signature sensor with one or more reading elements. The book holder is adapted to accept a book with pages including illustrations and/or text, wherein at least some of the pages include magnetic signatures. The method comprises the step of attaching the magnetic signatures in a specified location on pages of the book. The book is then placed on the book holder in a position wherein the magnetic signatures on the pages of the book are properly aligned with the reading elements of

the magnetic signature sensor on the reading surface of the book holder. Once in position, the pages of the book can then be turned in order to view the illustrations and/or text therein.

5 The method further comprises the step of detecting the specified locations of the magnetic signatures on the pages utilizing the reading elements of the magnetic signature sensor. As such, the illustrations and/or text on each of the pages are identified by the magnetic signatures attached in the specified locations on the pages.

10 The method also comprises the step of correlating the specified locations with stored audio representations related to the illustrations and/or text on the pages within the book. The audio representations are then retrieved and reproduced in preparation for audible delivery.

15 The method further comprises the step of delivering audible sounds corresponding to the stored audio representations via a speaker to accompany the illustrations and/or text on the page or pages of a book.

20 In another embodiment of the present invention disclosed is a method for electronically storing text and audio content for use in an electronic book reader system. The method comprises the step of creating electronic equivalent representations of the text and audio content which corresponds to illustrations and/or text on the pages within the book. Thus, the creating step
25 further includes the step of recording sounds and/or words related to the illustrations and/or text of the book for viewing and listening by a user.

30 The method further comprises the step of storing the electronic equivalent representations in a first electronic memory space. In order to store this data, the electronic equivalent representations are formatted into a digital format. The digital formatted electronic equivalent representations are then sorted into a plurality of addresses (e.g., A0, A1, A2 . . . An) within the

first electronic memory space. Once the electronic equivalent representations are sorted, the digital formatted data is packaged utilizing a chip housed within a cartridge means. The cartridge means is then inserted into an electronic book reader system adapted to receive the cartridge means. Upon
5 inserting the cartridge means into the electronic book reader system, a duplicate of the electronic equivalent representations stored in the first electronic memory space is downloaded into a second electronic memory space which is housed within the electronic book reader system. Thus, the electronic equivalent representations are stored in identical addresses in both
10 memory spaces for easy identification and retrieval.

In yet another embodiment of the present invention disclosed is an electronic book reader system for illustrating sound and text. The system comprises a reading surface adapted to accept a book with pages including
15 illustrations and/or text, wherein at least some of the pages include magnetic signatures attached at specified locations. The system also comprises a book support surface adjoined to one side of the reading surface. The book support surface is adjoined to the reading surface by a means adapted to fold in a manner allowing for both surfaces to meet for easy carrying of the
20 electronic book reader system. As such, the reading surface and book support surface are substantially flat platforms. In addition, the system also comprises a bracket coupled to one side of the reading surface adapted to hold the book in place while the page, or pages are being turned by a user.

25 The system further comprises a magnetic signature sensor which includes one or more individualized reading elements. The reading elements are pre-aligned on the reading surface in order to correspond with the magnetic signatures at their specified locations on the pages within the book. The magnetic signature sensor is predisposed to detect the magnetic
30 signatures on the pages as they are turned by the user viewing the book.

5 The system also comprises a reading controller which is adapted to interact with the magnetic signature sensor in order to determine what page, or pages the user is viewing. Communicably coupled with the reading controller is a power supply adapted to activate and de-activate the functionality of the electronic book reader system. The power supply is further coupled with a Light Emitting Diode (LED) indicator for determining the state (e.g., on/off) of the reader system.

10 The system also comprises a cartridge slot within the electronic book reader adapted to receive a cartridge. The cartridge includes stored audio representations related to the illustrations and/or text of the pages within the book. The stored audio representations of the illustrations and/or text within the cartridge corresponding to the page, or pages being viewed by the user are retrieved and reproduced by the reading controller. A speaker, which is
15 communicably coupled with the reading controller, is then utilized in delivering the audio representations for listening and reading along with the page, or pages viewed by the user.

20 Disclosed in another embodiment of the present invention is a cartridge device for storing text and audio content converted into electronic equivalent representations for use in an electronic book reader system. The device comprises a carrier means for housing the electronic equivalent representations. The carrier means can include a box with a top surface, a bottom surface, a first side, a second side, a front side and a back side.

25 The device further comprises a chip adapted to store the electronic equivalent representations. The chip further includes a first electronic memory space configured to store the electronic equivalent representations. The first electronic memory space also includes a memory array comprising a
30 plurality of addresses (e.g., A1, A2 . . . An) for sorting the electronic equivalent representations. As such, the first electronic memory space is configured to communicate with a second electronic memory space housed

within the electronic book reader system. Both memory spaces include identical addresses for easy storing and retrieving of the electronic equivalent representations.

5 The device further comprises a plurality of pins adapted to communicate with the electronic book reader system. The plurality of pins are located on the front side of the carrier means and are adapted for inserting into the electronic book reader system. Thus, the pins allow for the chip to download the stored data in a first memory space to corresponding
10 addresses in a second memory space.

 A technical advantage of the invention is an electronic book reader system which allows for the reader to follow along one page at a time using digital means. As such, the reader is in control of his or her reading speed
15 and audible representations delivered by a speaker as the reader turns each page.

BRIEF DESCRIPTION OF THE DRAWINGS

20 For a more complete understanding of the present invention including its features and advantages, reference is made to the following detailed description of the invention in conjunction with the accompanying drawings of which:

25 Figure 1 illustrates an electronic book reader system according to a preferred embodiment of the present invention;

 Figure 2 shows a block diagram of the electronic book reader system in accordance with the preferred embodiment of the present invention;

30 Figure 3 is a schematic diagram illustrating one embodiment of the present invention;

Figure 4a-4c are magnetic signatures which may be implemented in the preferred embodiment of the present invention;

5 Figure 5 depicts the relationship between the magnetic signatures and the magnetic signature sensor; and

Figure 6 is a logic diagram depicting the sensor state at each level of one embodiment of the present invention.

10 Corresponding numerals and symbols in the figures refer to corresponding parts in the detailed description unless otherwise indicated.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

15 While the making and using of various embodiments of the present invention are discussed in detail below, it should be appreciated that the present invention provides many applicable inventive concepts which can be embodied in a wide variety of specific contexts. The specific embodiments discussed herein are merely illustrative of specific ways to make and use the
20 invention, and do not delimit the scope of the invention.

To better understand the invention, reference is made to Figure 1, which depicts an electronic book reader system 10 for illustrating sound and text, in accordance with the preferred embodiment of the present invention.
25 The electronic book reader 10 comprises a reading surface 14 and a book support surface 16, which are substantially flat platforms. The book support surface 16 is adjoined to one side of the reading surface 14 by a means adapted to fold in a manner allowing for both surfaces 14,16 to meet for easy carrying of the electronic book reader system 10. The reading surface 14 is
30 adapted to accept a book 18 with pages 20. On the other hand, the book support surface 16 is adapted to support the pages 20 viewed by a user.

Together, the book support surface 16 and the reader surface 14 form a book holder 12.

5 The book 18 accepted by the reading surface 14 further comprises pages 20 including illustrations and/or text. Each of the pages 20 include a magnet 22 which allows for the page, or pages being viewed by the user to remain open on the reading surface 14 and book support surface 16. Some of the pages 20 also include magnetic signatures 24 which are attached at specified locations on the pages 20. Magnetic signatures 24 are utilized in
10 identifying the page 20 being viewed by the user, as well as detecting the content of the particular page 20.

The electronic book reader system 10 also comprises a magnetic signature sensor 26 which is incorporated as part of the reading surface 14.
15 The magnetic signature sensor 26 includes one or more individualized reading elements 28. These reading elements 28 are pre-aligned on the reading surface 14 in order to correspond with the magnetic signatures 24 at their specified locations. The magnetic signature sensor 26 is predisposed to detect the magnetic signatures 24 on the pages 20 as they are turned by a
20 user viewing the book 18. In operation, the book 18 is placed on the book holder 12 and held in place by a bracket 30 which is located at the bottom edge of the reading surface 14. Holding the book 18 in place is important in order to allow the reading elements 28 to properly correspond with the magnetic signatures 24 on the pages 20.

25 The electronic book reader system 10 further comprises a cartridge 34, or digital means (e.g., CD), and a cartridge slot 36. The cartridge slot 36 is part of the book holder 12 and is adapted to receive the cartridge 34. The cartridge 34 can include stored audio representations related to the
30 illustrations and/or text on the page, or pages 20. Once the cartridge 34 is inserted into cartridge slot 36, the power can then be turned on, indicated by an LED indicator 38. Audio representations of the illustrations and/or text on

pages 20 can then be heard through a speaker 44. The volume of the audio representations heard through the speaker 44 can be controlled by a volume controller 40 which allows for enjoyable listening while reading along with the pages 20 viewed by the user.

5 With reference to Figure 2, a block diagram of the electronic book reader system for illustrating sound and text 10 is shown in accordance with the preferred embodiment of the present invention. In triggering the sensor properties of the system 10, a magnetic signature 24 attached in a specified location on a page 20 within a book 18 must make contact with a magnetic signature sensor 26, which comprises one or more individualized reading elements 28. Once the book 18 has been placed on the book holder 12, a user can then turn each page 20 of the book 18 individually in order to view illustrations and/or text on some of the pages 20. Upon the turning of each page 20, the magnetic signature 24 located on the page 20 being viewed will make contact with an individualized reading element 28 which is pre-aligned on the reading surface 14 of the book holder 12. Once the magnetic signature 24 has been detected by its corresponding reading element 28, the magnetic signature sensor properties 26 are triggered. The reading controller 42, which is communicably coupled with the magnetic signature sensor 26, is adapted to interact with magnetic signature sensor 26 in order to determine what page, or pages 20 the user is viewing. A correlation is then made between the detected specified location via the magnetic signature 24 and the stored audio representations related to the illustrations and/or text on the page, or pages 20 of the book 18. The objective is to retrieve only the audio representations corresponding to the text and/or illustrations on the detected page 20 so as to allow the user to listen and follow such text and/or illustrations. The audio representations, may include words and/or music, for example.

30 The components housed within the book holder 12 are operated by a power supply 46, which may include, for example, 3V batteries. The power

supply 46, which is communicably coupled with the reading controller 42, is adapted to activate and de-activate the functionality of the electronic book reader system 10. The power supply 46 is, for example, activated by an on/off switch (not shown). In addition, a speaker 44 is also communicably coupled with the reading controller 42 and further adapted to deliver audio representations in order for the user to listen and read along with the page, or pages 20 being viewed by the user. Such audio representations can be retrieved from a cartridge 34 which includes stored electronic equivalent representations related to the illustrations and/or text corresponding to the pages 20.

Turning now to Figure 3, a schematic diagram illustrating one embodiment of the present invention is shown and denoted generally as 50. As previously discussed, each of the pages 20, which include magnetic signatures 24, are turned individually in order to activate the sensor properties 70. Each magnetic signature 24 corresponds with one individualized reading element 28. An array of reading elements 28, together form a magnetic signature sensor 26 located on the reading surface 14 of the book holder 12.

In one embodiment, Page 1 of book 18 can include illustrations and/or text. As Page 1 is viewed by a user on the reading surface 14 of the book holder 12, the magnetic signature 24 on Page 1 will correspond with a pre-aligned reading element 28 on the reading surface 14. The magnetic signature 24 contacts the reading element 28 of the magnetic signature sensor 26, and a bridge is formed between the two sensor properties. A signal for Page 1 is then sent through the logic 64 contained within the reading controller 42. The logic 64 of the reading controller 42 contains addresses (e.g., P2.0, P2.1...P5.1) which correspond with the pins 72 of the magnetic signature sensor 26. Page 1 will then have a signal carried by a current which will correspond with address (e.g., P2.0) 74 of the reading controller logic 64. This allows for Page 1 to be identified as such in order to retrieve its contents.

The reading controller 42 is adapted to interact with the magnetic signature sensor 26 in order to determine what page, or pages 20 the user is viewing. The reading controller 42 via logic 64 will then communicate with the corresponding address in the system 10 internal memory, or second memory space 52, which contains the corresponding electronic equivalent representations. The electronic equivalent representations include text and audio content which is stored on a chip (not shown) in a cartridge 34. Prior to storing, the text and audio content is converted into a digital format. This data is then stored on the chip comprising a first memory space 62. The first electronic memory space 62 includes a memory array which comprises a plurality of addresses (e.g., A1, A2 . . . An) for sorting the electronic equivalent representations. When the cartridge 34 housing the chip including the first electronic memory space 62 is inserted into the cartridge slot 36 of the electronic book reader system 10, the digital data stored on the chip is downloaded into corresponding addresses (e.g., A1, A2...An) in the second memory space 52. Thus, each address will contain the electronic equivalent representations corresponding to the page, or pages 20 which are being viewed by the user. The electronic equivalent representations are then delivered via AOUT 66, or an audio output signal. The audio output signal 66 is then carried to the reading controller 42, which is communicably coupled with a speaker 44. Speaker 44 is adapted to deliver the audio representations carried out by AOUT 66 for listening and reading along with the page, or pages 20 viewed by the user. Only the page, or pages 20 being viewed by the user will be delivered by the speaker 44 in order that the user may control his/her speed of reading. The system 10 functions using a power supply 46 which is communicably coupled with the reading controller 42. Power supply 46 is adapted to activate and de-activate the functionality of the electronic book reader system 10. The power supply 46 may include, for example, a 3V battery 80.

With reference to Figures 4a-4c, therein are shown magnetic signatures which may be implemented in the preferred embodiment of the

present invention. In one embodiment of the present invention, as shown in Figure 4a, the array of magnetic signatures 24, which are attached to at least some of pages 20 of a book 18, may include magnets with polarization (e.g., N and S) on both ends of each magnet. If the magnetic signature 24 with polarizations on either end of the magnet is utilized, the magnetic signature sensor 26 comprising one or more individualized reading elements 28 must correspond accordingly. Other variations of magnetic signatures 24 which may be implemented in a preferred embodiment of a present invention may include magnetic signatures 24 which have polarization on the top and bottom surfaces of the magnetic signature 24 and/or magnetic signatures 24 with polarization on either side of the magnetic signature 24. Again, regardless of the array of magnetic signatures 24 which are utilized in the system 10, the magnetic signature sensor 26 must be able to detect the corresponding magnetic signature 24 via the reading elements 28.

With reference to Figure 5, therein is shown the relationship between the magnetic signatures 24 and the magnetic signature sensor 26. In one embodiment, a book 18 may include five (5) pages 20, each containing illustrations and/or text therein. Therefore, each of the five (5) pages 20 will include a magnetic signature 24 which is attached at a specified location on each of page 20. The magnetic signatures 24 are small in size and will not require the page, or pages 20 to be significantly altered.

The reading surface 14 of the system 10 comprises a magnetic signature sensor 26 which includes one or more individualized reading elements 28. In one embodiment, only five (5) of the reading elements 28 will be utilized. The reading elements 28 are pre-aligned on the reading surface 14 in order to correspond with the magnetic signatures 24 at their specified locations on each of the pages 20.

A user will then place the book 18 containing five (5) of pages 20 on the reading surface 14. As the user views the illustrations and/or text on

Page 1, the magnetic signature 24 on Page 1 will be detected by the reading element 28 of the magnetic signature sensor 26 corresponding to the magnetic signature 24 on Page 1. As the magnetic signature 24 of Page 1 comes into contact with the corresponding reading element 28, a Low (L) voltage signal will be depicted as shown in Figure 6. The other magnetic signatures 24 will remain in a High (H) state until detected. Such signal from the corresponding sensor will then communicate with the logic 64 contained within the reading controller 42. It is the logic 64 which enables the reading controller 42 to retrieve the electronic equivalent representations corresponding to the text and/or illustrations on Page 1 and deliver them to in speaker 44 from a second memory space 52.

This sequence will then continue with the user turning to Page 2, which includes illustrations and/or text. As shown in Figure 6, while the user is viewing Page 2, two Low (L) voltages will be detected. This will, however, indicate that the user is on Page 2, and thus, retrieve the corresponding electronic equivalent representations stored in the second memory space 52 for delivery in an audible manner to the user. Only the electronic equivalent representations corresponding to the text and/or illustrations on Page 2 will be delivered by speaker 44 to the user. No additional sound will be heard until the user decides to turn to Page 3. As such, the user can control the speed of his/her reading of book 18 for enjoyment purposes.

While this invention has been described with a reference to illustrative embodiments, this description is not intended to be construed in a limiting sense. Various modifications and combinations of the illustrative embodiments as well as other embodiments of the invention will be apparent to persons skilled in the art upon reference to the description. It is, therefore, intended that the appended claims encompass any such modifications or embodiments.

What is claimed is:

- 1 1. A system for illustrating sound and text comprising:
2 a book with pages including illustrations and/or text, at least some of
3 said pages including magnetic signatures;
4 a book holder adapted to accept said book, said book holder having a
5 reading surface with a magnetic signature sensor, a cartridge slot, a reading
6 controller, a speaker, and a power supply; and
7 a cartridge adapted to be inserted in said cartridge slot, said cartridge
8 including stored audio representations related to said illustrations and/or text
9 of said pages;
10 wherein said magnetic signature sensor is predisposed to detect
11 magnetic signatures on said pages as they are turned by a user viewing said
12 book, and wherein said reading controller is adapted to interact with said
13 magnetic signature sensor to determine what page or pages said user is
14 viewing and to retrieve audio representations of illustrations and/or text stored
15 on said cartridge corresponding to said page or pages being viewed by said
16 user and to reproduce audible sounds related to said retrieved audio
17 representations through said speaker for listening by said user.
- 1 2. The system according to Claim 1 wherein said magnetic signatures are
2 attached to at least some of said pages in a specified location in order to be
3 detected by said magnetic signature sensor.
- 1 3. The system according to Claim 1 wherein said magnetic signature
2 sensor further comprises one or more individualized reading elements, said
3 reading elements pre-aligned on said reading surface in order to correspond
 with said magnetic signatures at their specified locations.
- 1 4. The system according to Claim 1 wherein said reading surface is a
2 substantially flat platform.

1 5. The system according to Claim 1 wherein said power supply is
2 communicably coupled with said reading controller and said speaker, said
3 power supply further adapted to control the activation and de-activation of
4 said book holder.

5
6 6. A method for illustrating sound and text utilizing a book holder
7 including a reading controller, a speaker, and a magnetic signature sensor
8 with one or more reading elements, said book holder adapted to accept a
9 book with pages including illustrations and/or text, at least some of said pages
10 including magnetic signatures, the method comprising the steps of:

11 attaching said magnetic signatures in a specified location on said
12 pages;

13 detecting the specified locations of said magnetic signatures utilizing
14 said reading elements of said magnetic signature sensor;

15 correlating said specified locations with stored audio representations
16 related to said illustrations and/or text of said pages; and

17 delivering audible sounds corresponding to said stored audio
18 representations via said speaker to accompany the illustrations and/or text on
19 said page or pages.

1 7. The method according to Claim 6 wherein said attaching step is
2 followed by the step of placing said book on said book holder in a position
3 wherein said magnetic signatures on said pages of said book are properly
4 aligned with said reading elements of said magnetic signature sensor.

1 8. The method according to Claim 7 wherein said placing step is followed
2 by the step of turning said pages of said book in order to view illustrations
3 and/or text therein.

1 9. The method according to Claim 8 wherein said turning step further
2 includes the step of identifying the illustrations and/or text on said pages
3 utilizing said magnetic signatures attached in specified locations on said
4 pages detected by said reading elements of said magnetic signature sensor.

1 10. The method according to Claim 6 wherein said delivering step is
2 preceded by the step of retrieving the stored audio representations of said
3 illustrations and/or text corresponding to said page or pages being viewed by
4 said user.

1 11. The method according to Claim 10 wherein said retrieving step is
2 followed by the step of reproducing the stored audio representations of said
3 illustrations and/or text retrieved corresponding to said page or pages being
4 viewed by said user.

5
6 12. A method for electronically storing text and audio content for use in an
7 electronic book reader system, the method comprising the steps of:

8 creating electronic equivalent representations of said text and audio
9 content; and

10 storing said electronic equivalent representations in a first electronic
11 memory space.

1 13. The method according to Claim 12 wherein said creating step further
2 includes the step of recording sounds and/or words corresponding to
3 illustrations and/or text of a book.

1 14. The method according to Claim 12 wherein said storing step further
2 includes the step of formatting said electronic equivalent representations into
3 a digital format.

1 15. The method according to Claim 12 wherein said storing step further
2 includes the step of sorting said electronic equivalent representations into a
3 plurality of addresses (e.g., A0, A1, A2 . . . An) within said first electronic
4 memory space.

1 16. The method according to Claim 12 wherein said sorting step is
2 followed by the step of packaging said electronic equivalent representations
3 stored in said first electronic memory space utilizing a chip housed within a
4 cartridge means.

1 17. The method according to Claim 16 wherein said packaging step further
2 includes the step of inserting said cartridge means into said electronic book
3 reader system adapted to receive said cartridge means.

1 18. The method according to Claim 17 wherein said inserting step is
2 followed by the step of downloading a duplicate of said electronic equivalent
3 representations stored in said first electronic memory space into a second
4 electronic memory space housed within said electronic book reader system.
5
6

1 19. An electronic book reader system for illustrating sound and text
2 comprising:

3 a reading surface adapted to accept a book with pages, said pages
4 including illustrations and/or text, at least some of said pages including
5 magnetic signatures attached at specified locations;

6 a book support surface adjoined to one side of said reading surface,
7 said book support surface adapted to support said page or pages viewed by a
8 user;

9 a magnetic signature sensor including one or more individualized
10 reading elements, said magnetic signature sensor predisposed to detect said
11 magnetic signatures on said pages as they are turned by said user viewing
12 said book;

13 a bracket coupled to said reading surface adapted to hold said book in
14 place while said page or pages are turned;

15 a reading controller adapted to interact with said magnetic signature
16 sensor in order to determine what page or pages said user is viewing; and

17 a power supply communicably coupled with said reading controller
18 adapted to activate and de-activate the functionality of said electronic book
19 reader;

20 a cartridge slot within said electronic book reader adapted to receive a
21 cartridge including stored audio representations related to said illustrations
22 and/or text of said pages; and

23 a speaker communicably coupled with said reading controller adapted
24 to deliver said audio representations for listening and reading along with said
25 page or pages viewed by said user.

26 wherein said reading controller is adapted to retrieve and reproduce
27 said audio representations of said illustrations and/or text stored on said
28 cartridge corresponding to said page or pages being viewed by said user.

1 20. The system according to Claim 19 wherein said reading elements
2 are pre-aligned on said reading surface in order to correspond with said
3 magnetic signatures at their specified locations.

1 21. The system according to Claim 19 wherein said reading surface
2 and said book support surface are substantially flat platforms.

1 22. The system according to Claim 21 wherein said reading surface
2 and said book support surface are adjoined by a means adapted to fold in a
3 manner allowing for both surfaces to meet for easy carrying of said electronic
4 book reader system.

1 23. The system according to Claim 19 wherein said reader further
2 comprises a volume control adapted to control the volume of the deliver of
3 said audio representations for enjoyable listening by said user.

1 24. The system according to Claim 19 wherein said power supply is
2 coupled with a Light Emitting Diode (LED) indicator for determining the state
3 (e.g., On/Off) of said electronic book reader system.

1 25. A cartridge device for storing text and audio content converted into
2 electronic equivalent representations of said text and audio content for use in
3 an electronic book reader system, the device comprising:

4 a carrier means for housing said electronic equivalent representations;
5 a chip adapted to store said electronic equivalent representations; and
6 a plurality of pins adapted to communicate with said electronic book
7 reader system.


1 26. The device according to Claim 25 wherein said carrier means includes
2 a box with a top surface, a bottom surface, a first side, a second side, a front
3 side and a back side.

1 27. The device according to Claim 26 wherein said front side includes said
2 plurality of pins adapted for inserting into said electronic book reader system.

1 28. The device according to Claim 25 wherein said chip further comprises
2 a first electronic memory space configured to store said electronic equivalent
3 representations.

1 29. The device according to Claim 28 wherein said first electronic memory
2 space further includes a memory array comprising a plurality of addresses
3 (e.g., A1, A2 . . . An) for sorting said electronic equivalent representations.

1 30. The device according to Claim 28 wherein said first electronic memory
2 space is configured to communicate with a second electronic memory space
3 housed within said electronic book reader system.

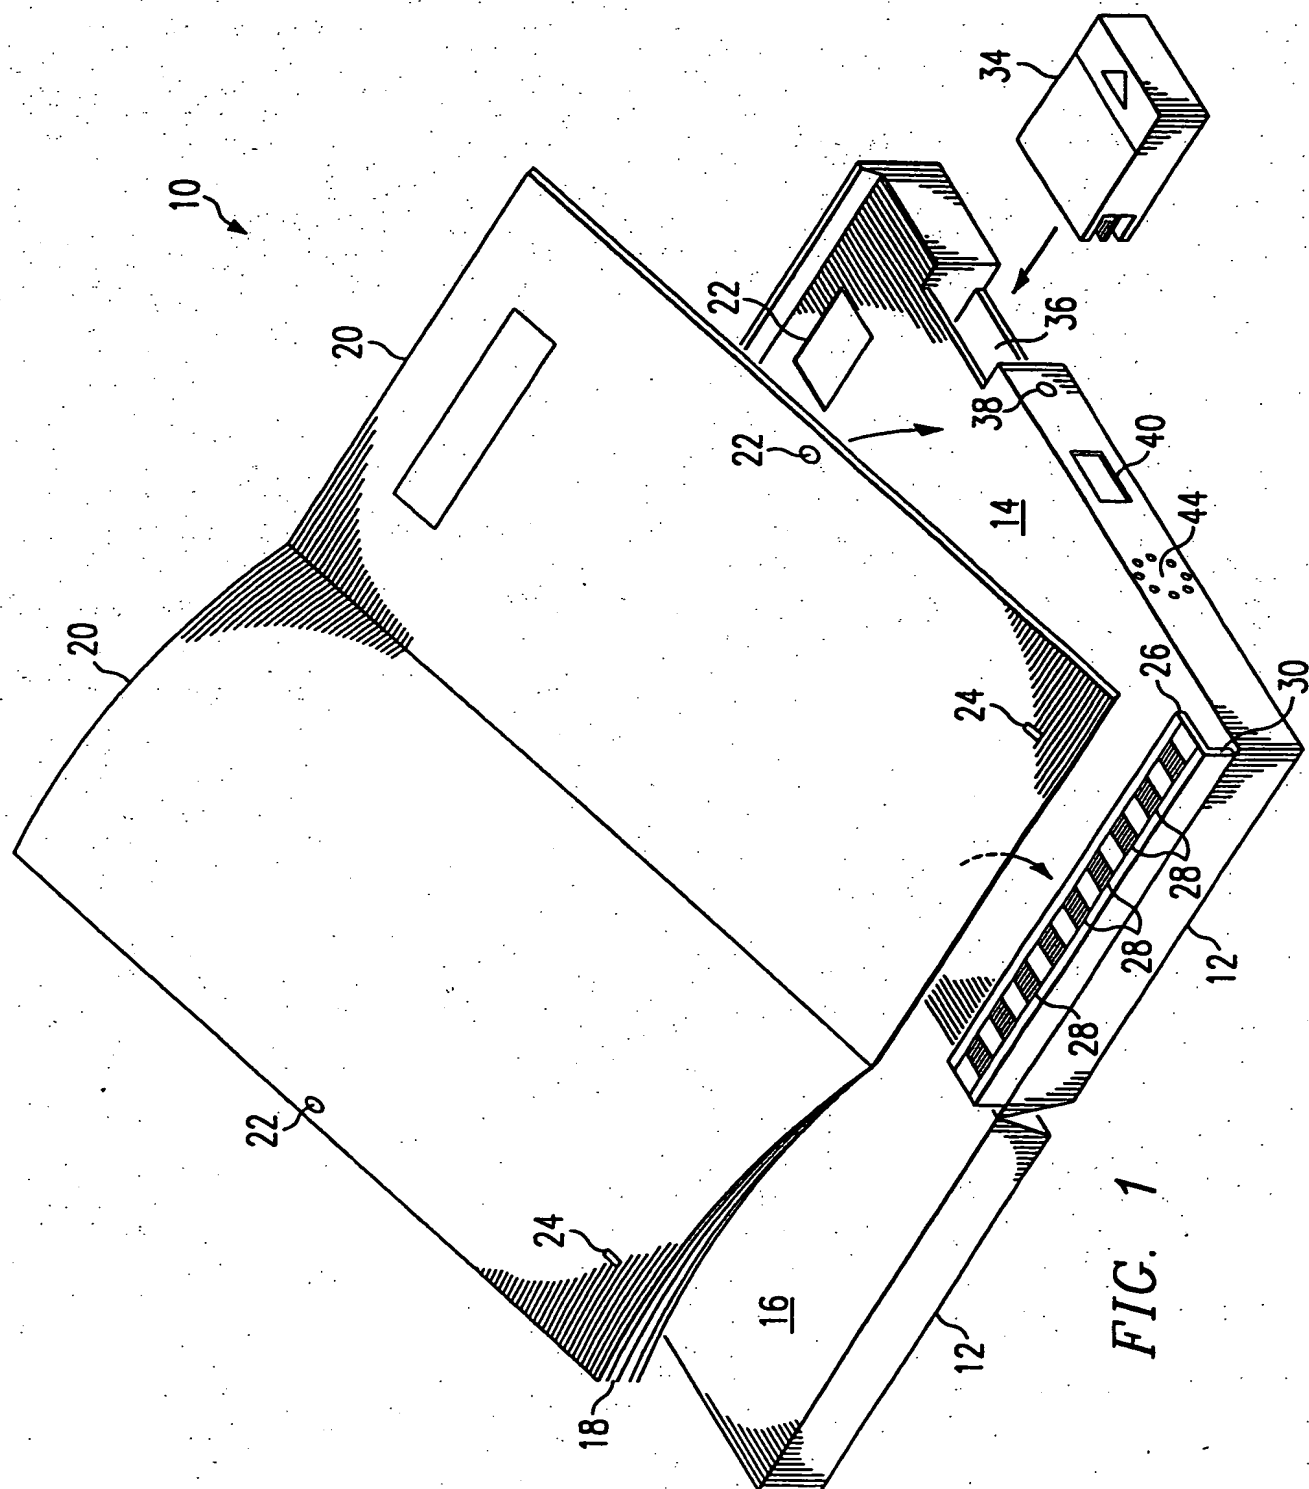

2/5



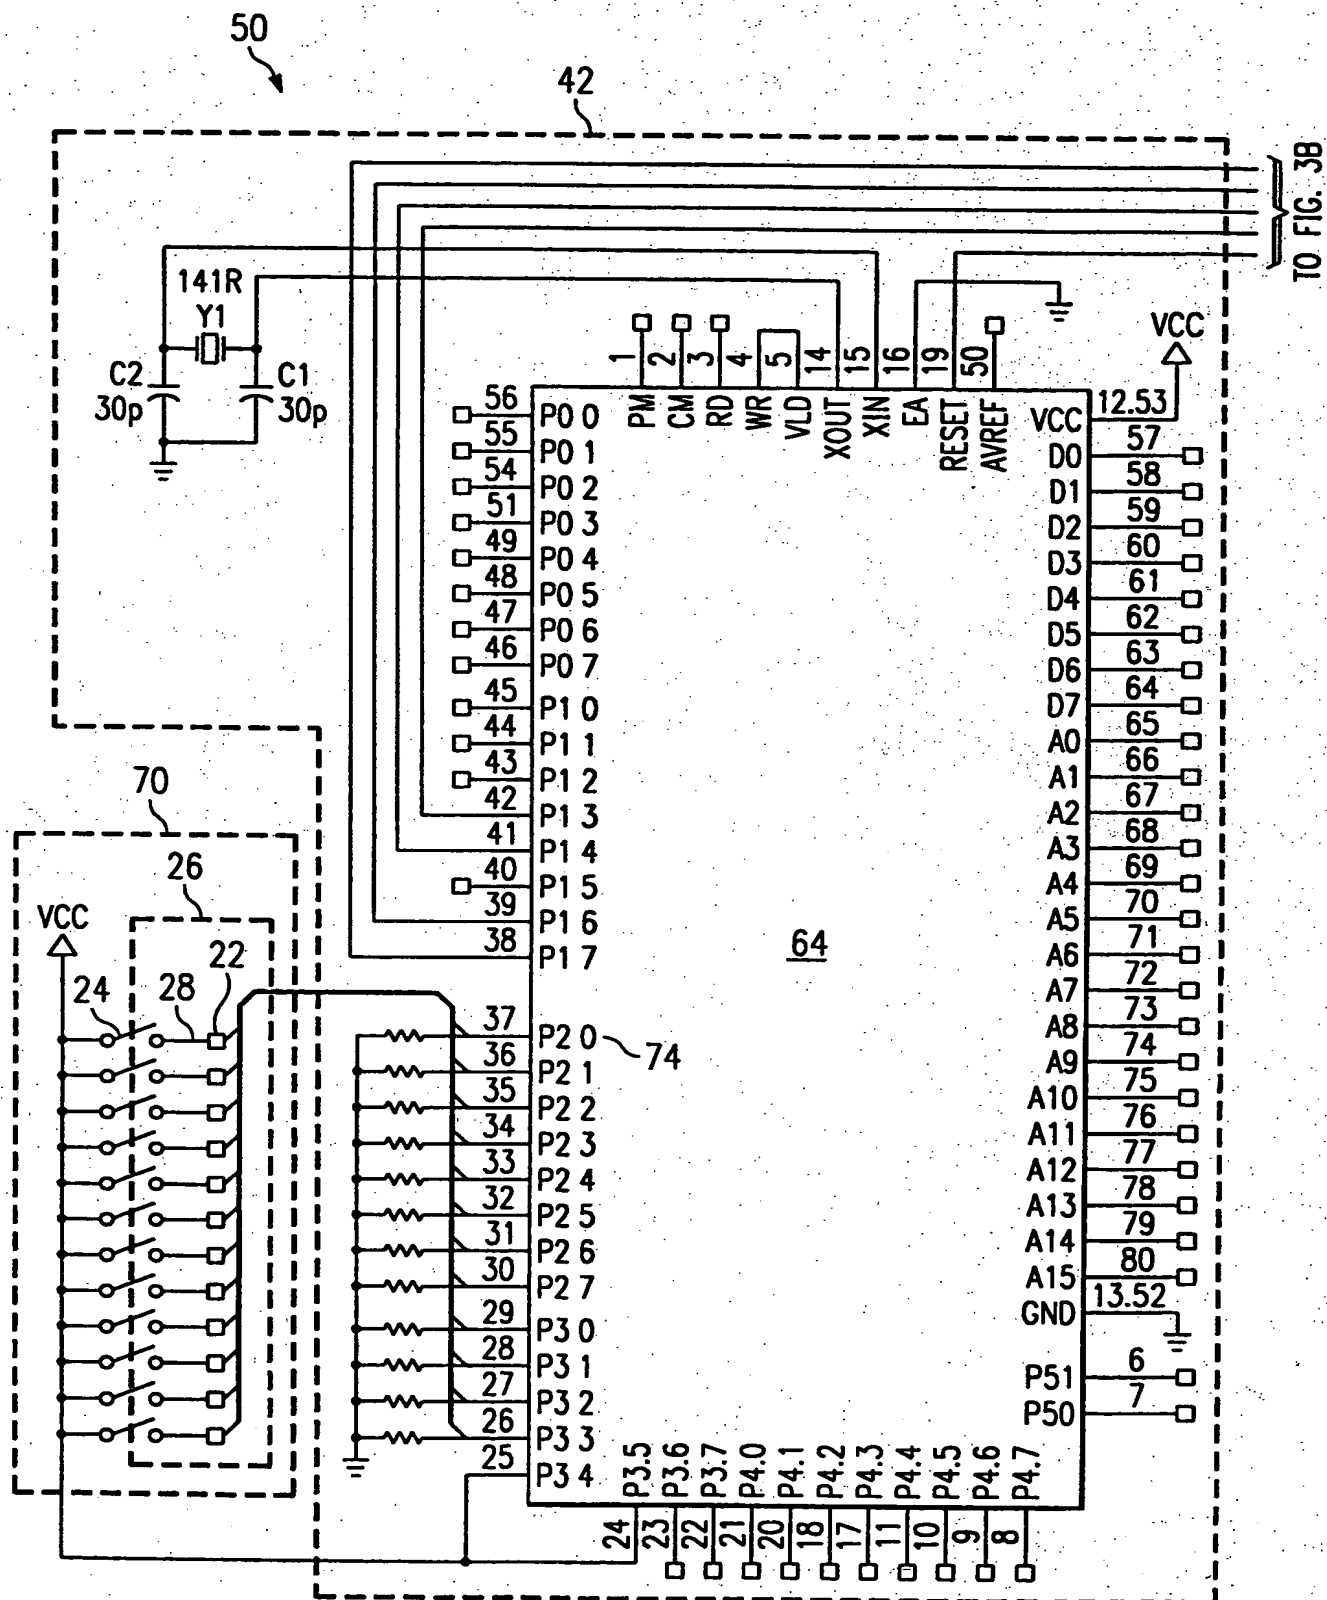


FIG. 3A

3/5

50

FIG. 3B

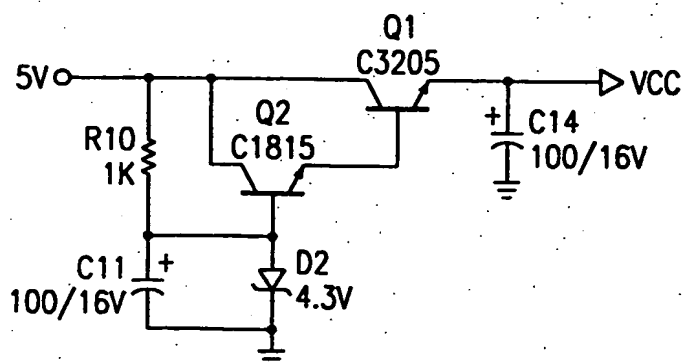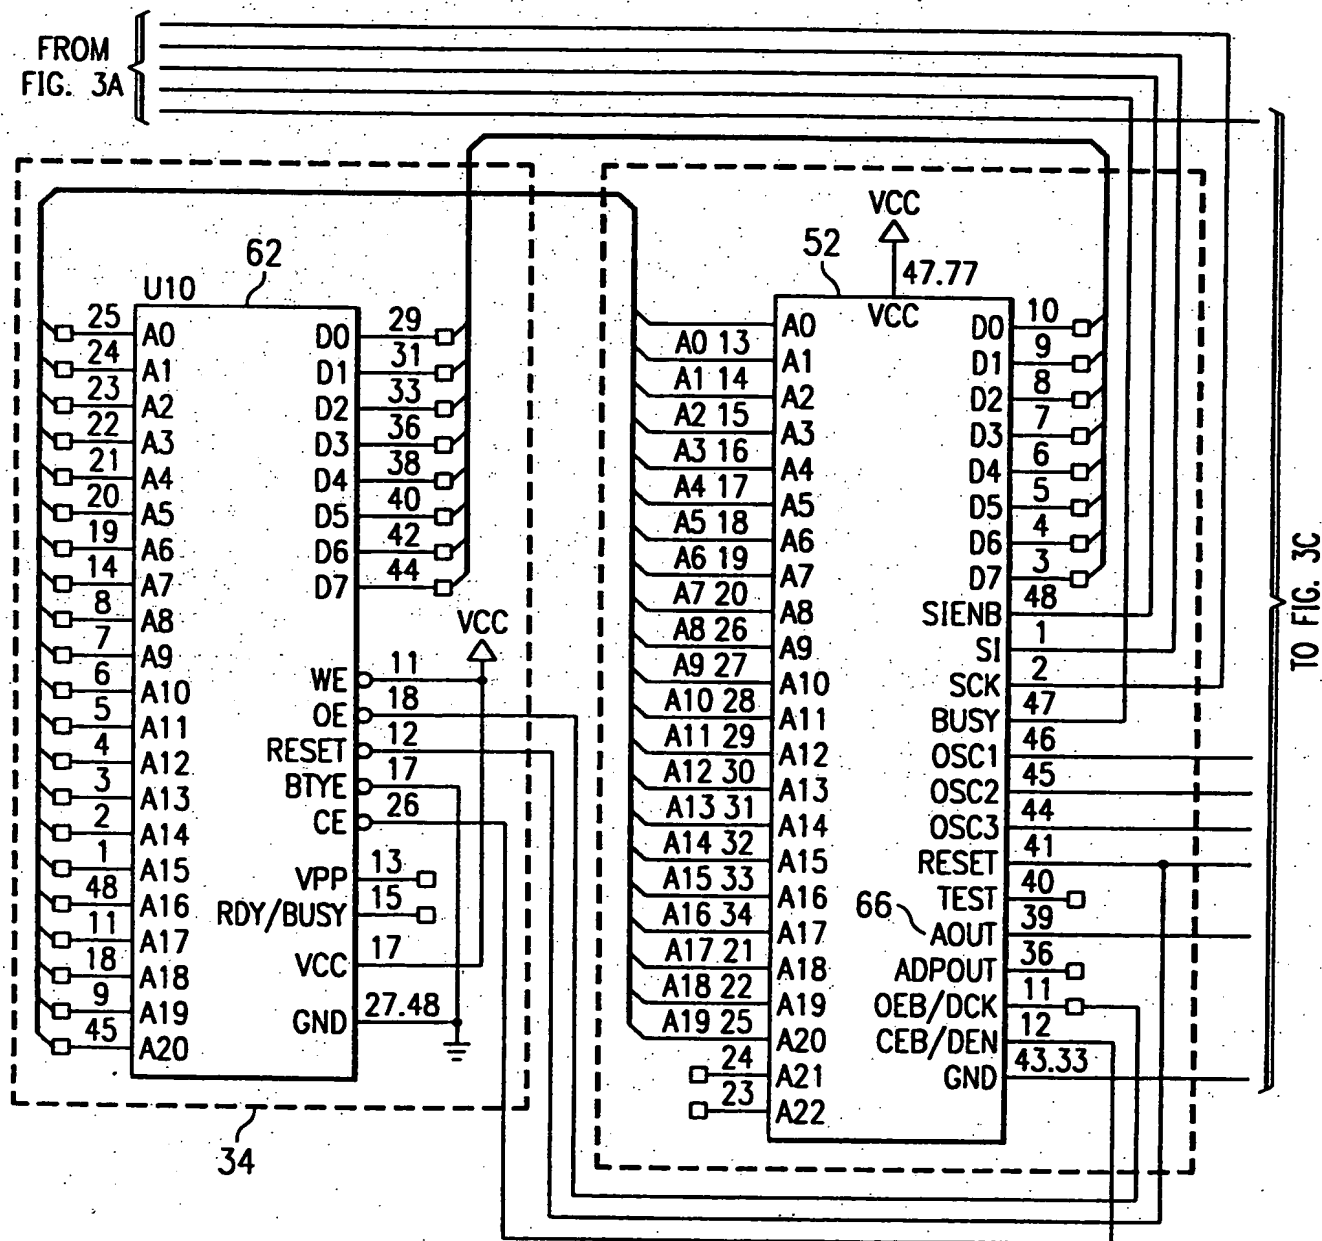

4/5

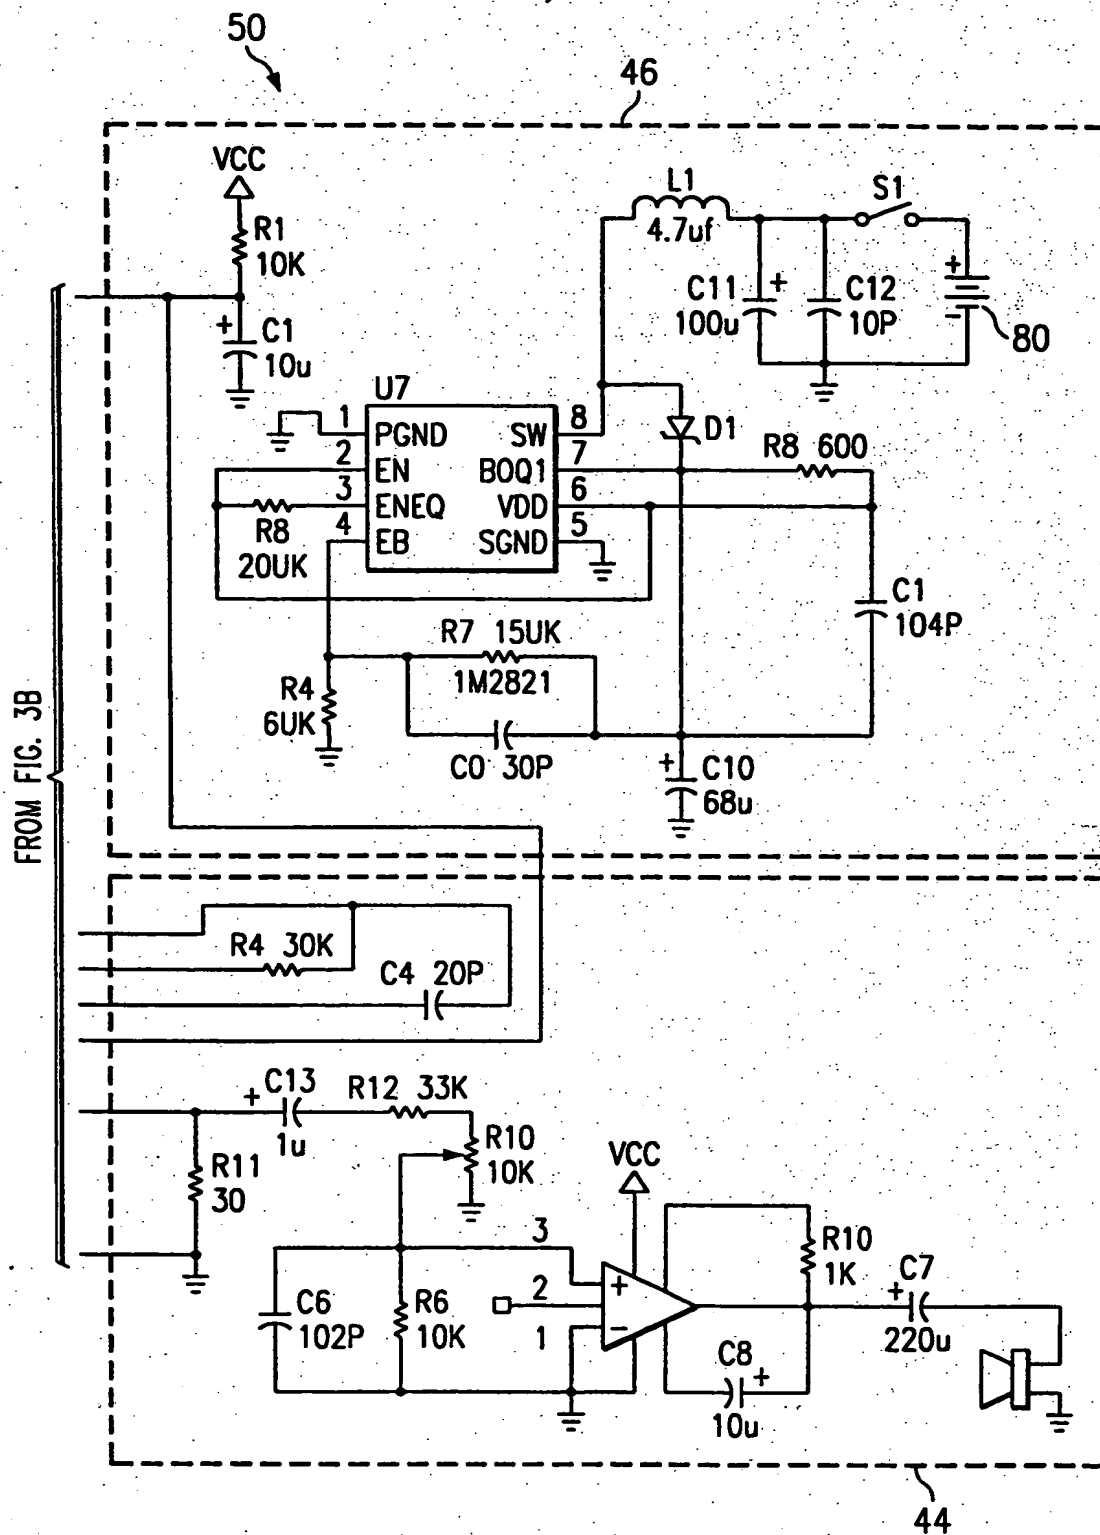


FIG. 3C

5/5

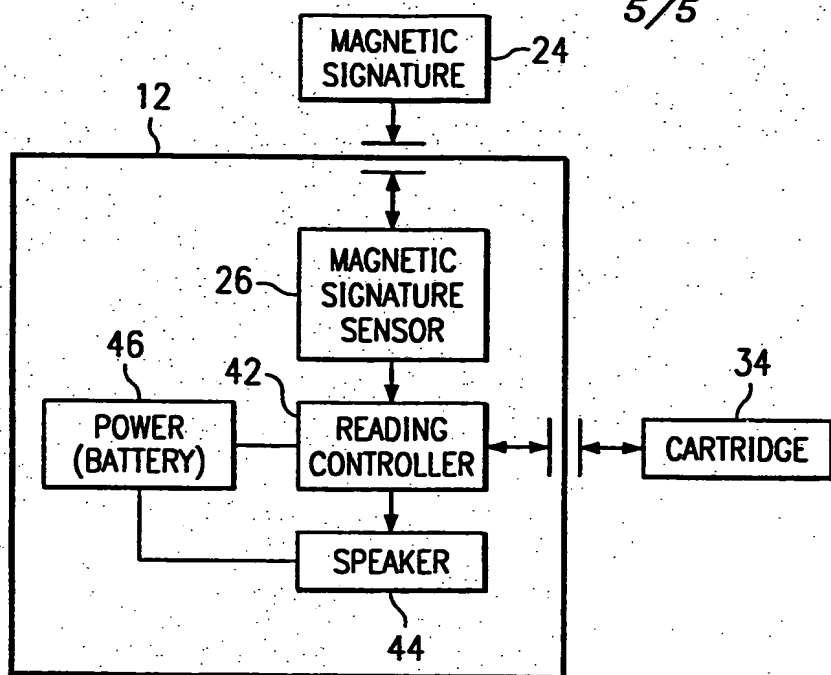


FIG. 2

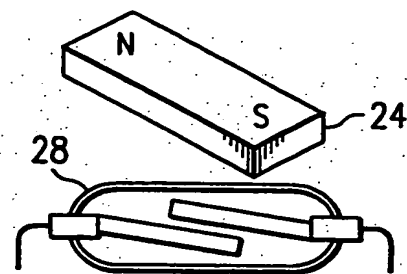


FIG. 4a

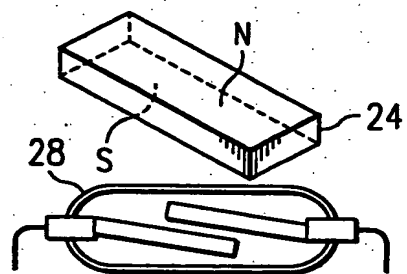


FIG. 4b

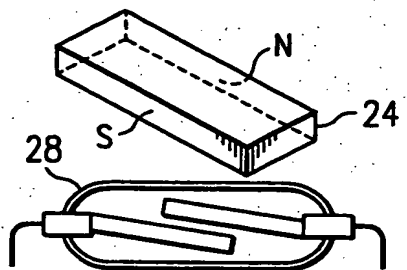


FIG. 4c

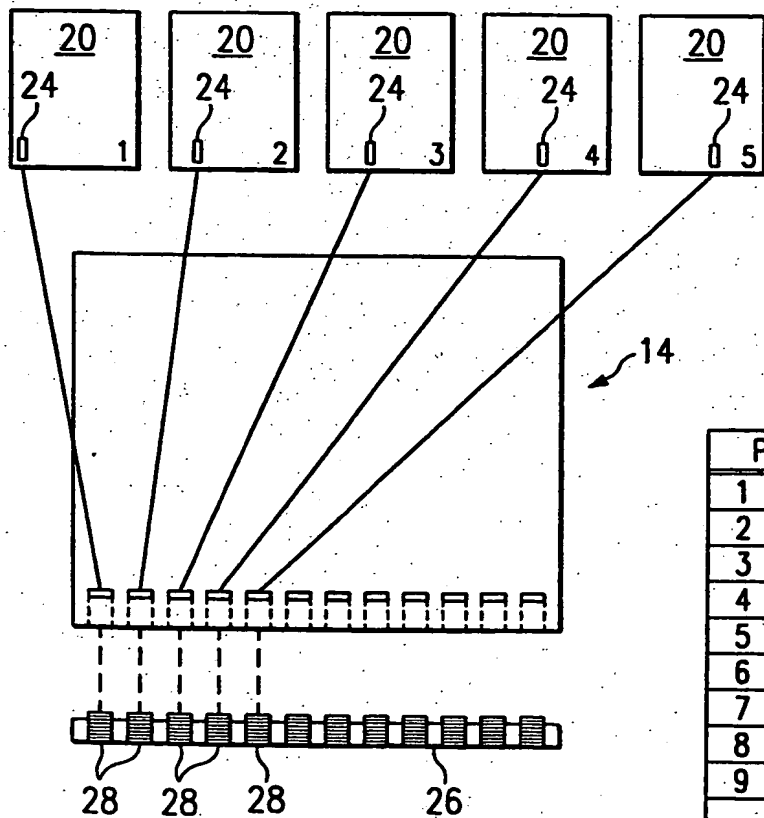


FIG. 5

PAGE	SENSOR STATE									
1 PAGE	L	H	H	H	H	H	H	H	H	H
2 PAGE	L	L	H	H	H	H	H	H	H	H
3 PAGE	L	L	L	H	H	H	H	H	H	H
4 PAGE	L	L	L	L	H	H	H	H	H	H
5 PAGE	L	L	L	L	L	H	H	H	H	H
6 PAGE	L	L	L	L	L	L	H	H	H	H
7 PAGE	L	L	L	L	L	L	L	H	H	H
8 PAGE	L	L	L	L	L	L	L	L	H	H
9 PAGE	L	L	L	L	L	L	L	L	L	H
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
n-1 PAGE	L	L	L	L	L	L	L	L	L	H

FIG. 6

L - LOW
H - HIGH



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 February 2001 (15.02.2001)

PCT

(10) International Publication Number
WO 01/11588 A3

(51) International Patent Classification⁷: G09B 5/06

(21) International Application Number: PCT/US00/21864

(22) International Filing Date: 8 August 2000 (08.08.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/147,975 9 August 1999 (09.08.1999) US
09/557,644 25 April 2000 (25.04.2000) US

(71) Applicant and

(72) Inventor: SONG, Jin, K. [US/US]: 2316 Woodfield Way,
Bedford, TX 76012 (US).

(74) Agent: NAVARRO, Arthur, L.; Navarro IP Law Group,
P.C., 801 East Campbell Road, #655, Richardson, TX
75081 (US).

ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,
KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD,
MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD,
SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN,
YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(88) Date of publication of the international search report:
4 October 2001

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD AND SYSTEM FOR ILLUSTRATING SOUND AND TEXT

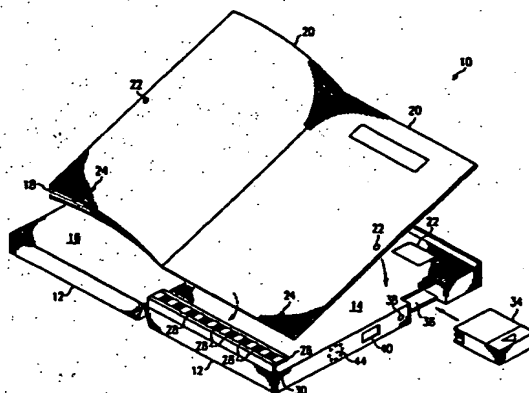

(57) Abstract: A method and system (10) for illustrating sound and text comprising a book (18) with pages (20) including illustration and/or text, wherein at least some of the pages (20) include magnetic signatures (24). The system further includes a book holder (12) adapted to accept the book (18). As such, the book holder (12) has a reading surface (14) with a magnetic signature sensor (16), a cartridge slot (36), a reading controller (42), a speaker (44), and a power supply (46). The system also comprises a cartridge (34) adapted to be inserted in the cartridge slot (36). The cartridge (34) includes stored audio representations related to the illustrations and/or text of the pages (20). The magnetic signature sensor (16) is predisposed to detect the magnetic signatures (24) on the pages (20) as they are turned by a user viewing the book (18). Furthermore, the reading controller (42) is adapted to interact with the magnetic signature sensor (16) to determine what page or pages (20) the user is viewing and to retrieve the audio representations of the illustrations and/or text stored on the cartridge (34) corresponding to the page or pages (20) being viewed by the user. Thus, the reading controller (42) reproduces the audible sounds related to the retrieved audio representations through the speaker (44) for listening by the user.

WO 01/11588 A3

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 00/21864

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G09B5/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G09B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 262 616 A (LANDA N) 6 April 1988 (1988-04-06) the whole document	1-11, 19-24
Y	US 5 707 240 A (DOWE D ET AL) 13 January 1998 (1998-01-13) the whole document	1-11, 19-24
X A	US 5 531 600 A (BAER R ET AL) 2 July 1996 (1996-07-02) column 4, line 27 -column 6, line 9 column 11, line 31 -column 14, line 8 -/--	12-18, 25-30 1,2, 4-11,19, 21,22

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

S document member of the same patent family

Date of the actual completion of the international search

20 April 2001

Date of mailing of the international search report

26/04/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

van der Linden, J.E.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 00/21864

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 851 119 A (BECKMAN R ET AL) 22 December 1998 (1998-12-22) column 2, line 51 -column 5, line 53	12-18, 25,26, 28,30
A	US 5 631 883 A (LI Y) 20 May 1997 (1997-05-20) the whole document	1,2, 4-11,19, 21,22
P,X	WO 00 11634 A (PRAGMATIC DESIGNS INC) 2 March 2000 (2000-03-02) page 8, line 11 -page 10	12-18, 25-29

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/21864

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0262616 A	06-04-1988	DE 8626080 U	27-11-1986
		DE 8701687 U	02-07-1987
		DE 8702569 U	30-07-1987
		JP 63101886 A	06-05-1988
US 5707240 A	13-01-1998	JP 10024690 A	27-01-1998
US 5531600 A	02-07-1996	US 5437552 A	01-08-1995
		AU 1370195 A	14-03-1995
		WO 9505650 A	23-02-1995
US 5851119 A	22-12-1998	US 5636995 A	10-06-1997
US 5631883 A	20-05-1997	US 5768223 A	16-06-1998
WO 0011634 A	02-03-2000	US 6004135 A	21-12-1999

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.